

3722

Docket No. 4742

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE


In re patent application of: FORD et al.

Serial No. 09/493,652

Filed: January 28, 2000

Title: MAIL LOCATION APPARATUS

Group Art Unit: 3722



TECHNOLOGY CENTER 3700

APR 12 2000

RECEIVED

ASW 3/7/01

PRIORITY DOCUMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Dear Sir:

Transmitted herewith is a certified copy of British Application No. 9902062.0, filed 29 January 1999, priority of which is hereby claimed under 35 U.S.C. §119.

Respectfully submitted,

Charles W. Fallow
Reg. No. 28,946

SHOEMAKER AND MATTARE, LTD.
2001 Jefferson Davis Highway - Suite 1203
Arlington, Virginia 22202
(703) 415-0810

April 11, 2000

This Page Blank (uspto)



The Patent Office



INVESTOR IN PEOPLE



The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 18 February 2000

RECEIVED
APR 12 2000
TECHNOLOGY CENTER 3700

This Page Blank (uspto)



29 JAN 1999

1/77
01FEB99 E421828-6 J00853
P01/7700 0.00 - 9902062.0

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

9902062.0

1. Your reference

13054

2. Patent application number

(The Patent Office will fill in this part)

3. Full name, address and postcode of the or of each applicant (underline all surnames)

NEOPOST LIMITED
South Street
Romford
Essex, RM1 2AR

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

0611 7007001
United Kingdom

4. Title of the invention

MAIL LOCATION APPARATUS

5. Name of your agent (if you have one)

HUGHES CLARK & CO

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

114/118 Southampton Row
London WC1B 5AA

Patents ADP number (if you know it)

877008

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Yes

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

0

Description

6

Claim(s)

Abstract

Drawing(s)

1 + 1

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Hughes Clark & Co
HUGHES CLARK & CO

Date

29 January 1999

12. Name and daytime telephone number of person to contact in the United Kingdom

K. B. WENMAN
0171 404 5414

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

MAIL LOCATION APPARATUS

This invention relates to the detection of mail and in particular to detection that a mail item is correctly positioned to receive a postage imprint.

5

Postal authorities require that postal indicia are printed in a specified position in the upper right hand corner of mail items. Accordingly, in printing devices for printing postal indicia on mail items, it is necessary that the
10 mail item be correctly positioned relative to a print head to ensure that the postal indicia is printed in the specified position on the mail item. In postage meter printing devices in which the mail item is fed along a feed bed by a mail transport mechanism, the mail item is
15 inserted with an upper edge thereof in engagement with a guide and the transport mechanism then feeds the mail item while maintaining the upper edge of the item in engagement with the guide. When a leading edge of the mail item is sensed by a sensor, printing of the postal indicia is
20 initiated. The position of the guide relative to the print head determines the spacing of the printed indicium from the upper edge of the mail item and the position of the sensor determines the spacing of the indicium from the leading right hand edge of the mail item. Thus it will be
25 appreciated that the sensor is required only to detect movement of the mail in one direction, namely the direction in which the mail item is fed by the transport mechanism.

30 In postage metering apparatus intended to handle a smaller number of mail items, the mail item transport mechanism is dispensed with and the mail item is inserted into the apparatus and must be correctly positioned manually. Accordingly it is necessary to provide mail detection
35 means capable of ensuring that the mail is correctly positioned in mutually perpendicular directions prior to initiation of printing of the postal indicium.

According to the invention a mail location apparatus operative to locate a mail item at a predetermined location in first and second mutually perpendicular directions includes a first guide for engagement by a first edge of a mail item; a second guide for engagement by a second edge of the mail item; said second edge being adjacent to and adjoining said first edge at a corner of the mail item; sensor means including a face engageable by said corner of the mail item; said face being inclined to both said first and second directions; said sensor means being operated in response to the mail item being located in said predetermined location.

An embodiment of the invention will now be described by way of example with reference to the drawings in which:-
Figure 1 is sectional view of a mail receptor and sensor of a postage meter on a line 1 - 1 of Figure 2,
Figure 2 is a section on the line 2 - 2 of Figure 1, and
Figure 3 illustrates a mail item and a print field thereon.

Referring to the drawings, a mail receptor includes an upper wall 10 from which a rear wall 11 and a side wall 12 extend. A mail support platform 13 extends below the upper wall 10 and is movable between open and closed positions. In the open position as shown in Figure 2 the platform is in a lowermost position spaced from the upper wall 10 to permit the entry into the mail receptor of a mail item to receive an imprint and to permit the removal of the mail item from the mail receptor after receiving the imprint. In the closed position, the platform is urged toward the upper wall 10 so that a mail item in the receptor is pressed by the platform against the upper wall 10 and clamped between the platform and the upper wall. Preferably the platform is urged toward the closed position by compression springs and is moved to the open

position by a mechanism operated by the postage meter.

The upper wall 10 has an aperture 14 therein so that, when a mail item is correctly positioned in the mail receptor, a print field 15 of a mail item 16, see Figure 3, is aligned with the aperture and hence is exposed for receiving an imprint from an ink jet print head, indicated at 30. During printing of the imprint, the mail item is held by being clamped between the platform 13 and the upper wall 10 and hence the surface of the mail item to receive the imprint is located in a plane determined by the wall 10. The print head is traversed in the direction of arrow 31 across the aperture to print a required postal indicium imprint in the print field of the mail item.

When a mail item is inserted into the mail receptor, an upper edge 17 of the mail item lies adjacent the rear wall 11 and a right edge 18 of the mail item lies adjacent the side wall 12.

Postal authorities specify the location of the print field 15 in which a postal indicium is to be printed on a mail item. The location of the postal indicium is specified as a distance 19 from the upper edge 17 and a distance 20 from the right hand edge 18. Accordingly the rear wall 11 is located relative to the traverse of the print head such that when the upper wall 17 of the mail item is located in engagement with the rear wall 11, the print head prints the indicium with the required spacing 19 from the upper edge of mail item. The operation of the print head during its traverse of the aperture 14 is timed such that with the right hand edge 18 of the mail item located in engagement with the side wall 12, the print head prints the indicium with the required spacing 20 from the right hand edge 18 of the mail item.

An ink jet printer mechanism including a mechanism for

moving a mail support platform is described in co-pending application filed on the same date as the present application and entitled INK JET PRINTER MECHANISM.

5 In order that the postal indicium is printed in the specified print field of the mail item, it is necessary to ensure during the printing of the indicium the mail item that the mail item is correctly located in the receptor with the upper edge 17 in engagement with the rear wall
10 and with the right hand edge 18 in engagement with the side wall 12. This required location of the mail item in the receptor can be determined by detecting that a corner 21 of the mail item at the intersection of the upper edge 17 and the right edge 18 is located at an imaginary
15 intersection between the rear wall 11 and the side wall 12 of the receptor.

The rear wall 11 and the side wall 12 do not extend as far as the imaginary intersection therebetween and a mail
20 sensor indicated generally by the reference numeral 22 is located adjacent this imaginary intersection. The sensor includes an element 23 having a face 24 inclined to both the rear wall 11 and the side wall 12. A corner portion of the upper wall 10 and of the platform 13 is omitted and
25 the element extends at least to beyond the upper wall 10 and to at least beyond the mail engaging surface of the support platform 13 when in the open position. The element 23 is mounted on a lever 25 pivoted at 26 and is resiliently urged by a spring 29 into the position of the
30 element 23 shown in Figure 1. A shutter 27 secured relative to the element 23 extends into operative relationship with an electro-optic device 28. With the element 23 resiliently urged into the position shown in Figure 1, the face 24 thereof extends across a corner of
35 the mail receptor and the shutter is in a withdrawn position relative to the electro-optic device 28. When a mail item is inserted into the mail receptor to an extent

such that the upper edge 17 is located in engagement with the rear wall 11 and the right hand edge 18 is located in engagement with the sidewall 12, the corner 21 engages the face 24 of the element 23 and displaces the element
5 against the force of spring 29 and hence the shutter enters the electro-optic device and interrupts a radiation path between an emitter and a photocell to thereby produced an electrical sensing output signal. The output
10 signal is then utilised to initiate movement of the platform to clamp the mail item in the required correct position and after clamping of the mail item the printing operation is initiated to print the postal indicium on the mail item.

15 It will be appreciated that mail items may have a range of dimensions and the hence the mail receptor is open for receipt of mail either from a front of the receptor opposite the rear wall or from a side of the receptor
20 opposed to the side wall 12 and when the upper right-hand part of the mail item containing the print field 15 is located in the receptor, a remainder of the mail item extends away from the walls 11 and 12 beyond the extent of the upper wall and platform. Accordingly when a mail item is inserted manually into the receptor, the item may be
25 moved in a first direction aligned with the side wall 12, in a second direction aligned with the rear wall 11 or in a direction intermediate the first and second directions.

The rear wall 10 and the side wall 12 act as guides for
30 the mail items during manual entry of the mail item into the mail receptor. The walls also define locations at which the upper and right hand edges of the mail item must be located for the mail item to be correctly positioned for receipt of the postal indicium imprint. Furthermore it
35 will be appreciated that regardless of the direction of entry of the mail item, the sensor will be operated by engagement of the corner 21 of the mail item only when the

mail item is correctly located with the edges 17, 18 thereof in engagement with the walls 11 and 12 respectively. Furthermore because the face 24 is inclined to both the rear wall 11 and to the side wall 12 movement
5 of the mail item to the required correct position in the first direction aligned with the rear wall, in the second direction aligned with the side wall or in any direction intermediate the first and second directions will result in operation of the sensor 22. It is preferred that the
10 face 24 is inclined at approximately the same angle to both the rear and side walls and hence that the face is inclined to the walls at an angle of approximately 45° .

If the element 23 only extended as far as the upper wall
15 10 there is a possibility that very thin mail items may enter a gap between the element and the wall and become jammed. Accordingly, as described hereinbefore the face 24 of the sensor element 23 extends beyond the wall 10 and beyond the surface of the platform when in its open
20 position to prevent the occurrence of such a jam.

25

30

35

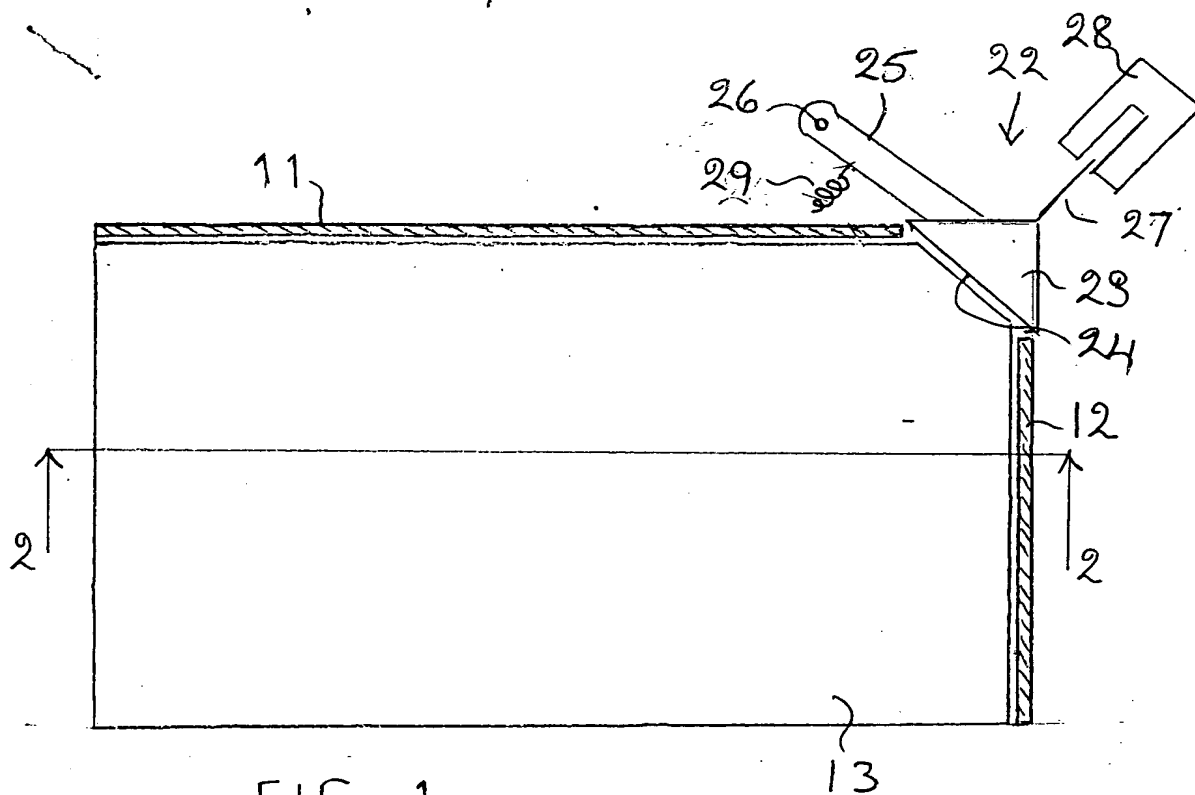


FIG. 1

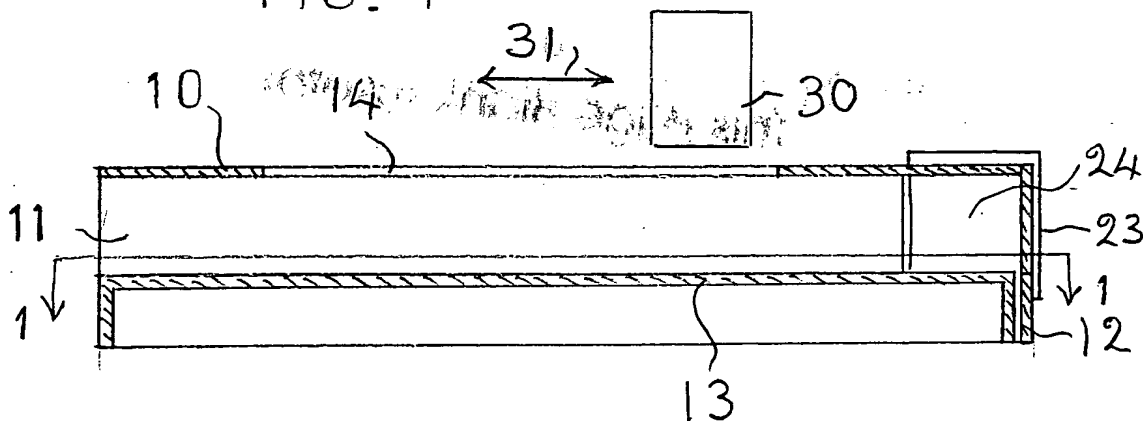


FIG 2

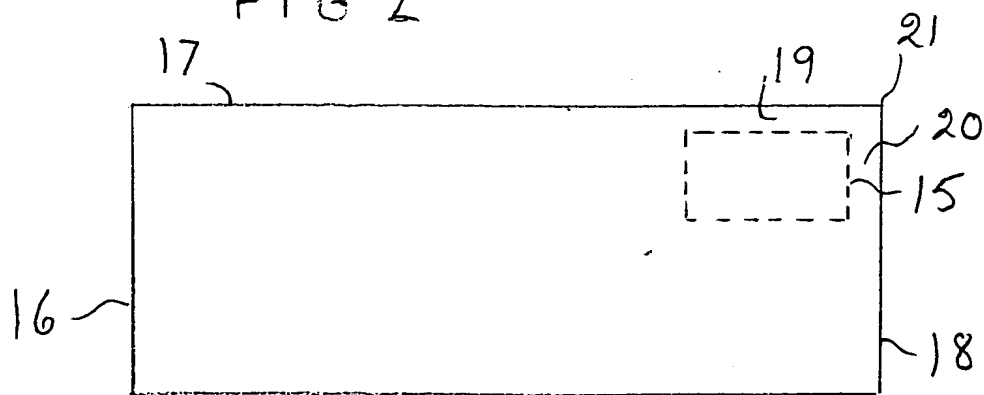


FIG 3

This Page Blank (uspto)